


Installation Instructions for AFP Yardarms

All yardarms should be located approximately one-third the distance from the top of flagpole. On a 25 foot pole the yardarm should be fastened about 8 feet from the top. On a 30 foot pole, about 10 feet from the top and so forth.

Steps:

- 1** While the pole is on the ground, fasten the yardarm in the appropriate position. The yardarm is supplied with white gasket material that should be placed between the front bracket and the pole, and the rear bracket and the pole. The gasket serves two purposes: 1) Provides a firm grip for the bracket to pole connection which prevents torquing of the yardarm and 2) Protects the pole from abrasion by the bracket which allows the smooth finish to be preserved should the yardarm need to be removed.
- 2** Tighten the 3/8" bolts and nuts supplied which are used to fasten the front and rear brackets, until the lock washer is compressed. **DO NOT OVERTIGHTEN.** The yardarm will be firmly held in place by the gasket material and the tightening of the bolts and nuts. Install (4) cap nuts onto the ends of the bolt threads.
- 3** Attach all halyards (ropes) to pulley assemblies and allow the halyards to hang freely.
- 4** Now follow directions for the installation of flagpoles (Hinge Base or Ground Sleeve). After the flagpole has been erected, mount the extra cleats on either side of the pole to tie the yardarm halyards. Fasten the flag clips, by pinching the halyard together, putting it through the eye of the clip, and then looping the halyard over the other side of the clip. The installation is now complete.

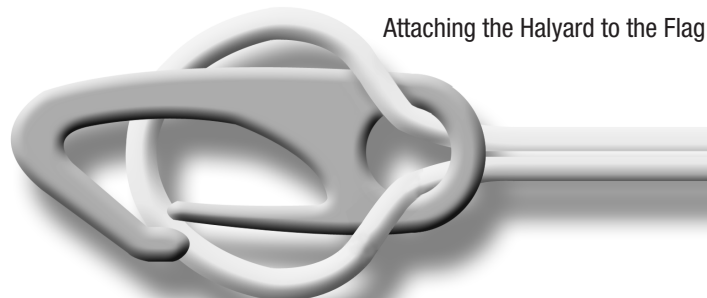

Attaching the Halyard to the Flag Clip